

## FITTING INSTRUCTIONS



# D SHAPE AND T BAR PULL HANDLES














### Fitting instructions FOR D SHAPE & T BAR PULL HANDLE


#### **Bolt through fixing**

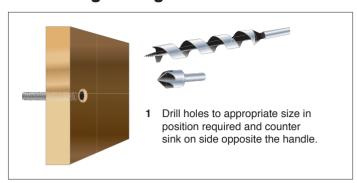


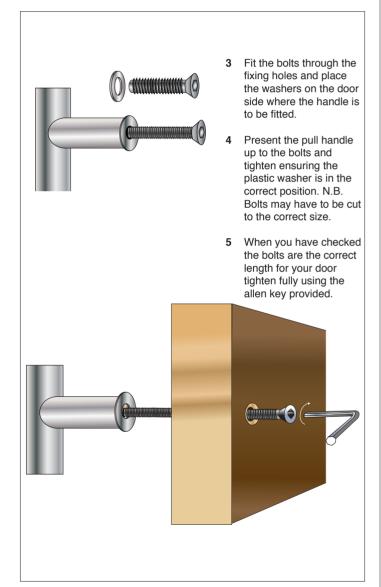

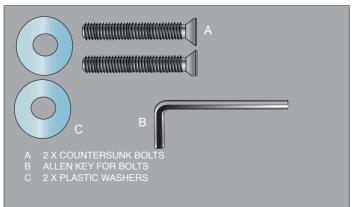


#### **Back to back fixing**

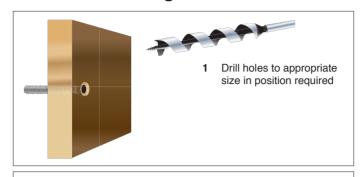

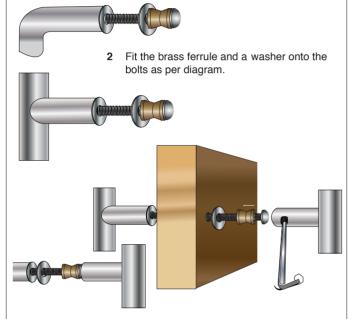

- 3 Place the bolts through the drilled holes and place another washer onto the bolts on the opposite side of the door
- Offer up the pull handle to the bolts (using the handle without grub screws) and tighten the bolts by hand as far as you can, then fully tighten using a screwdriver.
- Offer the other handle (using the one with grub screws fitted) and slide over the bolt heads and brass ferrules, once in position tighten the 4 grub screws on both sides of the pull handle.

#### **Fixing to glass doors**



Use the same method ad above but please use the white plastic washers and the white plastic or black rubber sleeves to protect the glass inside the drilled hole.

